

Type : 3EL080M2C-FA-A0-000

Date : 06/04/2026

Power [kW] : 1.10
 Input Voltage [V] : 400
 Connection Type [Δ / Y] : Y
 Frequency [Hz] : 50
 Pole Number : 2
 Nominal Speed [rpm] : 2880
 Nominal Current [A] : 2.26
 Nominal Moment [Nm] : 3.64
 Nominal Efficiency [η] : 82.7
 Power Factor [$\cos\phi$] : 0.85
 Locked Rotor Current [I_a/I_n] : 6.8
 Locked Rotor Torque [M_a/M_n] : 3.1
 Breakdown Torque [M_k/M_n] : 3.8
 Motor Color : RAL 7031
 Ambient Temperature : -15°C / +40°C

Efficiency Class : IE3
 Duty Cycle : S1
 Service Factor : 1.20
 Frame Size : 080M
 Weight [kg] : 10.9
 Insulation Class : F [155°C]
 Temperature Rise : B [80°K]
 Protection Class : IP55
 Vibration Severity Grade : A
 Method of Cooling : IC411 (TEFC)
 Direction of Rotation : Bidirectional
 Balance : Half Key
 Motor Thermal Protection : --
 Altitude Above Sea Level : 1000m
 Sound Pressure Level [dBA] : 54

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cos ϕ	Cl
Δ	230	50	1.10	2880	3.91	82.7	83.0	82.4	0.85	IE3
Y	400	50	1.10	2880	2.26	82.7	83.0	82.4	0.85	IE3
Y	460	60	1.10	3490	1.96	84.0	84.1	83.0	0.84	IE3
Y	460	60	1.28	3470	2.21	84.0	84.0	82.9	0.86	IE3


MECHANICAL DATA

Moment of Inertia [kgm²] : 0.00124
 Bearing [DS / NS] : 6204ZZ C3 / 6204ZZ C3
 Frame Material : Aluminum
 Flange Type / Material : B5 / Aluminum
 Cooling Fan Material : Plastic
 End Shield Material : Aluminum

TERMINAL BOX

Terminal Box Material : Aluminum
 Terminal Box Position : Top
 Terminal Box Cable Entry : M20x1.5
 Terminal Box Blind Cap : M16x1.5
 Contact Screw Thread : M4

MECHANICAL DIMENSIONS

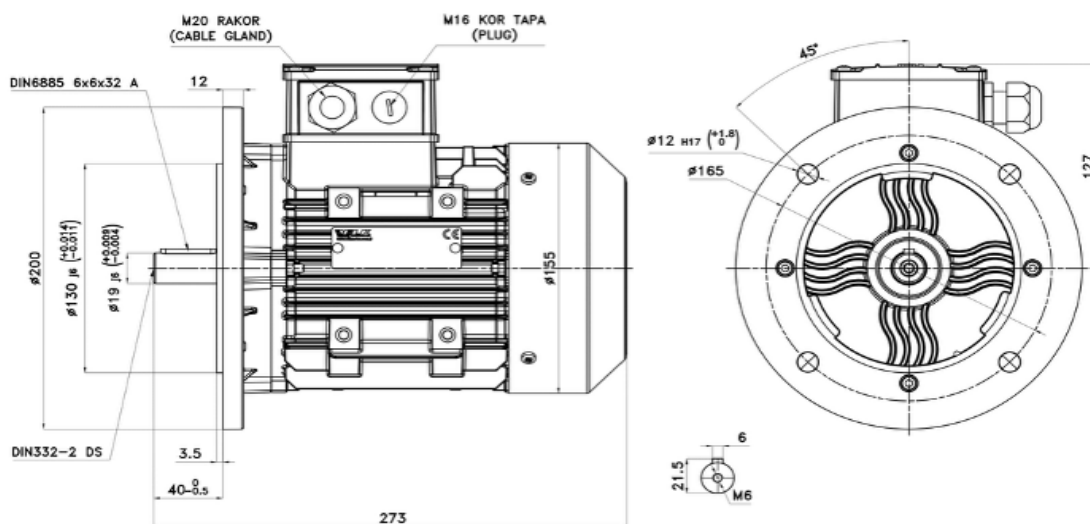

Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

**TECHNICAL DATASHEET ACCORDING TO
COMMISSION REGULATION (EU) 2019/1781
THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE**

Type : 3EL080M2C-FA-A0-000

Date : 06/04/2026


NAMEPLATE DATA

Power [kW]	: 1.10	Nominal Speed [rpm]	: 2880
Nominal Voltage [V]	: 400	Nominal Current [A]	: 2.26
Connection Type [Δ / Y]	: Y	Nominal Moment [Nm]	: 3.64
Nominal Frequency [Hz]	: 50	Nominal Efficiency [η %]	: 82.7

THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed n/n_N [%]	Torque T/T_N [%]	Relative Power Losses P_L/P_N [%]	Efficiency η [%]
P ₁	90	100	18.0	83.4
P ₂	50	100	16.2	75.5
P ₃	25	100	14.3	63.7
P ₄	90	50	9.4	82.7
P ₅	50	50	6.5	79.3
P ₆	50	25	4.7	72.8
P ₇	25	25	3.0	67.7

MAP OF RELATIVE POWER LOSSES P_L/P_N [%]

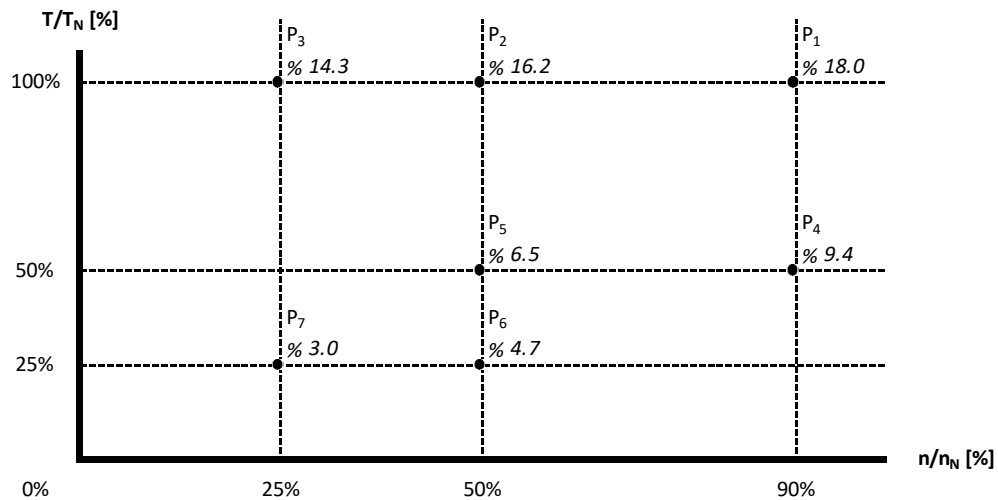


Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

Motor Code : 3EL080M2C-FA-A0-000

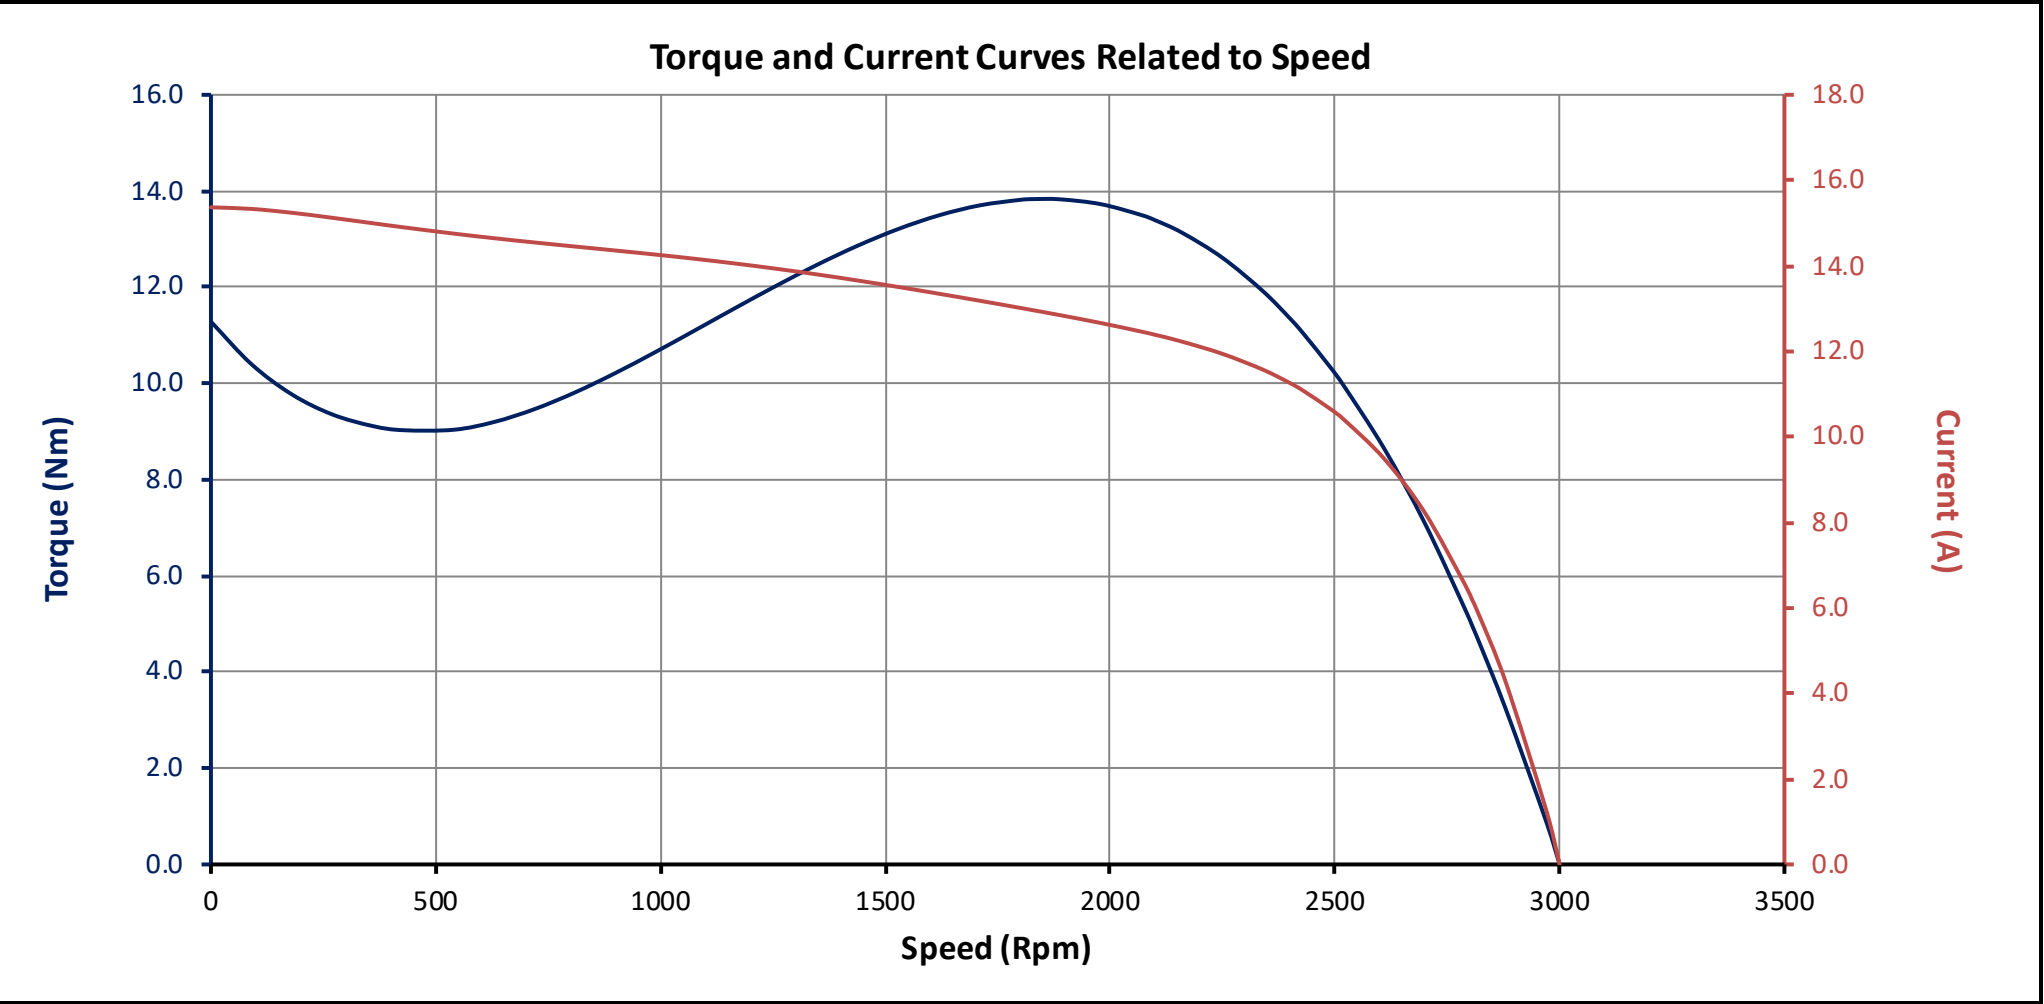

Motor Code : 3EL080M2C-FA-A0-000

Performance Curves Related to Rated Output

